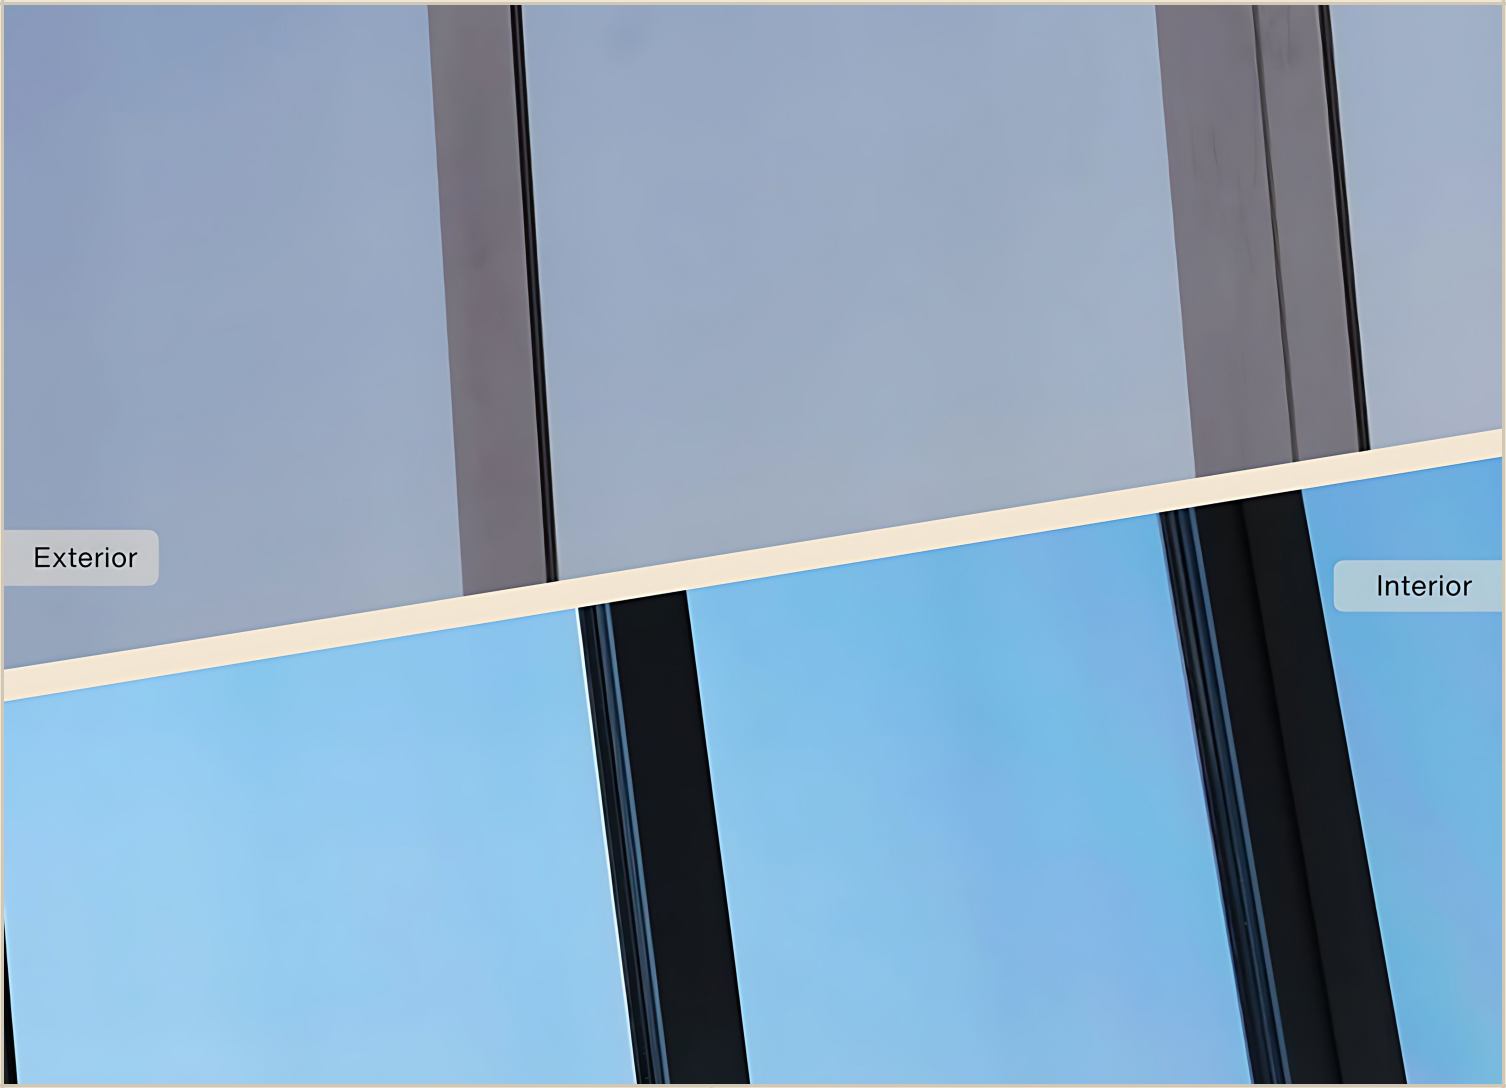


Solar Screen

www.windowfilmsdirect.co.uk

VISTA 90 XC

Solar Control

Dual Reflective One Way Mirror - Exterior

Description

Transform your windows with our External Dual Reflective 10 Silver Mirror Window Film, a high-performance solar control film designed for exterior glass applications. Combining excellent heat rejection, glare reduction, and enhanced daytime privacy, this premium reflective film delivers outstanding comfort while giving your windows a sleek, modern silver mirror appearance.


Engineered with dual reflective technology, this film features a highly reflective exterior surface to help minimise solar heat gain, while the less reflective interior surface helps maintain clearer outward visibility during the day. Ideal for homes, offices, commercial buildings, conservatories and large glazed areas.

Certified B Corporation


Visible Light Transmission (%)




Visible Light Reflection - External (%)

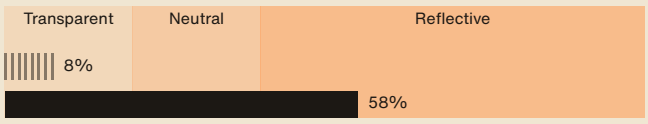

UV Rejection (%)



Total Solar Energy Rejected (%)

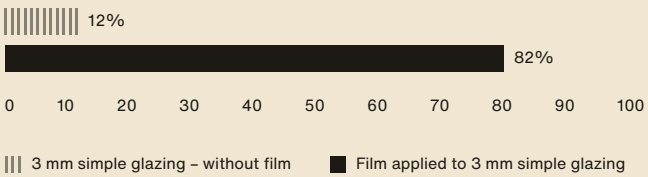

Solar Screen

www.windowfilmsdirect.co.uk

VISTA 90 XC

Solar Control
Dual Reflective One Way Mirror - Exterior

Characteristics

Warranty
3 years

Fire Resistance Rating
M1

Storage in recommended conditions
3 years

REACH / RoHS
Compliant

Widths Available
152 cm

Installation Type
Exterior

Color From the Outside
Silver

Length
30.5 m

Product Carbon Footprint (LCA)
1.49 kgCO2e/m²


Construction

1 Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
2 High optical quality polyester, with an IR-blocking metallic particle coating
3 Bonding adhesive
4 High optical quality dyed polyester
5 PS adhesive, polymerizes with glass within 15 days
6 Protection PET release liner, disposable after installation

Composition
PET

Thickness
60 µm

Details

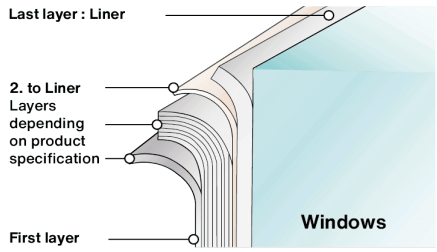

Energy and environmental benefits[01]

Energy savings
116.4 kWh/m²/year

Carbon footprint reduction
36.8 kgCO2/m²

Financial savings
27 euros/m²/year

Access our energy savings calculator

Optical and solar properties

	Single 3mm		Double Low-E	
Pane type	No film	With Film	No film	With Film
UV Rejection (%)	25	99	40	99
Visible Light Transmission (%)	**91**	**10**	**82**	**7**
Visible Light Reflection - External (%)	8	58	11	58
Visible Light Reflection - Internal (%)	8	14	12	17
Solar Energy Reflection (%)	5	58	28	59
Solar Energy Absorption (%)	8	32	12	34
Solar Energy Transmission (%)	87	10	60	7
Total Solar Energy Rejected (%)	**12**	**82**	**35**	**90**
Infrared Rejection (780 - 2500 nm) (%)	16	90	16	92
Glare Reduction (%)	-	89	-	91
Shading Coefficient	-	0.2	-	0.11
g-value	**0.88**	**0.18**	**0.65**	**0.1**
U-value (W/m².°C)	5.8	5.8	1.1	1.1

Application advice[02]

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes × Not recommended ! Caution

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.

Access the installation and maintenance advice video

01 Values based on a study carried out on an air-conditioned building located in Luxembourg, with a film applied on a low-E double glazing, facing East. The heating months considered are from October to March, and the cooling months from April to September. We consider an electric heating system of the heat pump type, with a production efficiency of 3.5 and an electric cooling system with an efficiency of 3. For more information, visit our online tool.

02 Advice based on glazed surface area up to 2.5 m², please contact us for any confirmation or thermal shock analysis.
The data in this information sheet is not contractual, SOLAR SCREEN reserves the right to modify the composition of its products at any time. Please refer to our warranties and general sales conditions.